


FORMATION OF PATTERN

Patent number: JP8083756
Publication date: 1996-03-26
Inventor: NODA SHUICHI
Applicant: OKI ELECTRIC IND CO LTD
Classification:
- **International:** C23F1/12; H01L21/027; H01L21/3065; C23F1/10; H01L21/02; (IPC1-7): H01L21/027; C23F1/12; H01L21/3065
- **European:**
Application number: JP19940219740 19940914
Priority number(s): JP19940219740 19940914

Report a data error here

Abstract of JP8083756

PURPOSE: To easily form a pattern with high accuracy by performing reactive ion etching (RIE) by using a mask pattern made of titanium(Ti) as an etching mask and a mixed gas of chlorine gas (Cl₂) and oxygen gas (O₂) as a reactive gas. **CONSTITUTION:** A sample substrate is prepared by successively forming a silicon nitride (SiN_x) film 12, tungsten (W) film 14 formed as a layer to be etched, titanium(Ti) film 16, and EB resist film 18 on a silicon substrate 10. Firstly, a resist pattern 18a is formed on the titanium film 16 and RIE is performed on the film 16 by using the resist pattern 18a. As a result of the etching, a Ti mask pattern 16a is formed. Then an X-ray absorber pattern 14a is formed by performing RIE on the layer (W film) 14 to be etched by using the mask pattern 16a as an etching mask and a mixed gas of chlorine gas (Cl₂) and oxygen gas (O₂) as a reaction gas.

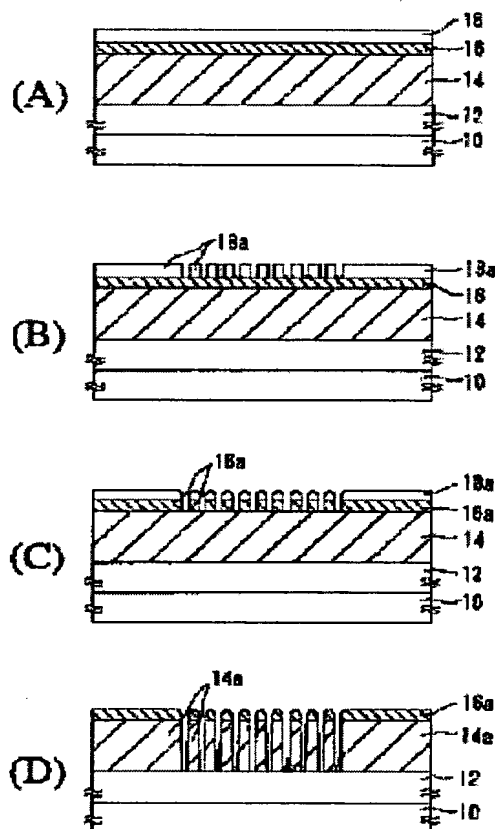

Data supplied from the esp@cenet database - Worldwide